

Introduction

The H2-Automotive router is the multi-service communications platform for vehicles. It provides reliable 4G/LTE and Wi-Fi broadband communications with redundancy, aggregation and advanced network security mechanisms options.

It is based on a rugged hardware design, with protection for the power supply and against vibrations, as well as specific mobility software, such as dynamic configurations (through positioning and communication quality) and delayed OFF. It is also easy to incorporate in management tools and Wi-Fi and Teldat or third party HotSpot platforms.

Product Highlights

- ▶ Multi-service communications platform
- ▶ Multiple simultaneous WAN (aggregation & balance)
- ▶ Power supply protection - MTBF improvements
- ▶ Geo-fencing: GPS-based dynamic configuration
- ▶ Isolation of standard-based services
- ▶ Manageable OFF to save battery
- ▶ Turnkey Wi-Fi solution (Management and HotSpot)

Interfaces

H2-Automotive

Up to 2 x 4G/LTE Module	Yes (Depends on the model)
Up to 2 x Wi-Fi 802.11n (Client and AP)	Yes (Depends on the model)
4+1 x Gigabit-Ethernet 10/100/1000Mbps	Yes
Asynchronous Serial Port (RS-232)	Yes
Embedded GPS (NMEA)	Yes
ON/OFF button	Yes
2 SMA LTE module connectors (MIMO)	Yes
2 SMA-RP Wi-Fi connectors (MIMO)	Yes

Competitive Advange

Simultaneous use several WWAN interfaces	Multiple LTE and/or Wi-Fi access links. Simultaneous use, with load aggregation and balance, or ensuring high application availability and continuity
Rugged hardware design	Hardware design to support thorough vibration and overvoltage tests. Minimising maintenance costs and outages.
GPS and service-based automatisms	Communication monitoring (availability and quality) and positioning for dynamic application of routing policies for each service, link and position.
Corporate networking software	It embarks the latest IP network technologies available in the vehicle, providing secure, quality and user-friendly multi-service mass deployment.

Scenarios

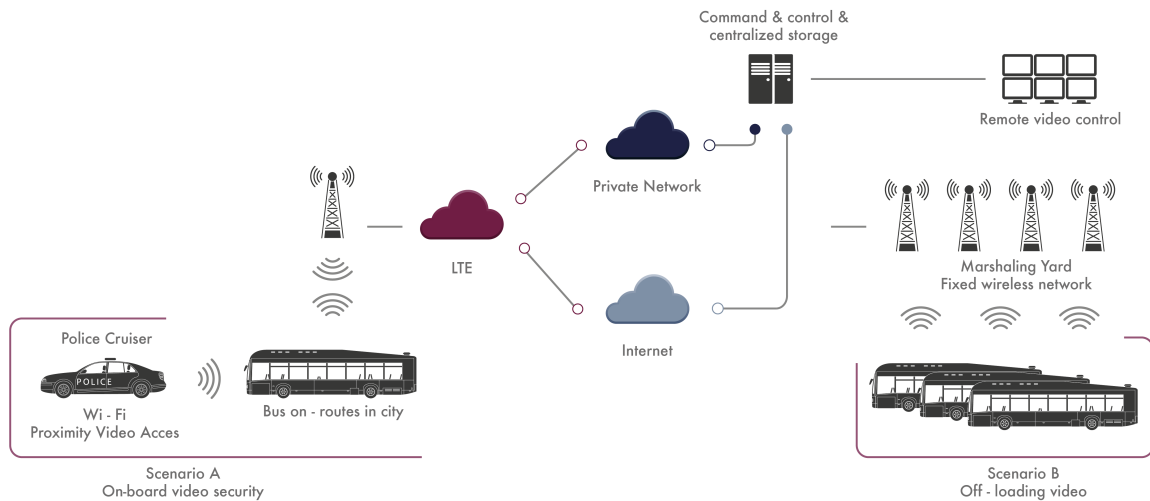


Figure: Connected bus: New public transport paradigm

Key Features

Broadband with simultaneous LTE connections Up to 2 WWAN modules (4G/LTE) can be installed. For separate operation or backup. One of the modules also supports Dual-SIM for operator redundancy.

4G/LTE dual-SIM for operator redundancy The double SIM facility with a single module for use by two telecommunications operators, using one as backup for the other using a single module.

2x Wi-Fi (802.11n) for high density or backup Wi-Fi Up to 2 Wi-Fi 802.11n modules enables and increase in Wi-Fi service capacity for high density environments. One of them can also operate as a client and the other as an AP to use external Wi-Fi networks as WAN.

Optimised hardware design for embarked environment Extended temperature range (0 to 50°C). Vibration-proof design. 12/240 Vdc for connection to batteries. Delayed OFF for application continuity after the vehicle is turned off, thus optimising battery consumption.

Protection power supply ISO7637-2 (MTBF improvement) Power supply protection stage that enables direct connection to vehicle batteries and minimises faults due to unstable power supply.

Aggregation/balance for application continuity Simultaneous use of WAN interfaces (LTE, Wi-Fi, Satellite, etc.) to share and/or aggregate the load from different services using different interfaces, optimising coverage areas and total performance solutions.

Isolated and secure multi-service communications The use of advanced products such as VRF, VLANs, QoS and Policy Routing together with multiple WAN links enables logical separation of each service and management of different solutions sharing the communications.

Embedded GPS (NMEA) easily integrated with 3rd parties Ideal for fleet management or telemarketing applications. The equipment comes with a GPS that can be accessed through a TCP port that supplies information on real time geo-positioning using NMEA data.

Dynamic performance based on positioning (GPS) Dynamic configuration according to the GPS position and use of Wi-Fi as an AP or client for data synchronisation in engine sheds or use of a SIM or other card to optimise coverage and data consumed.

Advanced troubleshooting (fine adjustment in the cloud) Advanced troubleshooting such as sniffer and syslog to analyse problems according to service, position and coverage on the path. Cloud management with self-provisioning allows for installation by non-qualified personnel.

HARDWARE TECHNICAL FEATURES

Up to 2 simultaneous WWAN Interfaces (LTE/HSPA+/HSPA/EDGE)

Up to 2 integrated hardware modules with HSPA+or LTE/HSPA + technology

2 external antennas with SMA connector per module

Additional support for additional USB modules (license optional)

Up to 2 Wi-Fi Interfaces (802.11abgn)

Access Point and client mode 802.11abgn selectable 2.4/5GHz

MIMO 2x2 with external antennas (SMA-RP connector) per module

WEP, WPA, WPA2 security. WMM QoS service quality Multi SSID

Dimensions and Weight

Length x Width x Height: 215 x 211 x 49 mm

Approximate weight: 1.9 Kg

Flexible installation: On a wall, ceiling and horizontal

Ethernet interfaces

4-port switch plus one optional WAN port (RJ45 connector)

802.3i (10BaseT), 802.3u (100BaseT), 802.3ab (1000BaseT)

Duplex support, speed link auto-negotiation IEEE 802.3u, VLAN y 802.1X

GPS interface

GPS antenna activates FME and NMEA protocol

Acquisition type (Hot Start 1s, Warm start 29s Cold Start: 32s)

Precision (Horizontal <2 m (50%); Altitude < 4 m (50%); Speed <0.2 m/s)

Environmental specifications

Temperature: 0 to 50 °C

Relative humidity: 5 to 95%

Shock and vibration-proof (EN 60068-2)

SOFTWARE TECHNICAL FEATURES

Specific Wi-Fi functions

HotSpot Gateway function for HotSpot service support

WLAN controller function for Teldat embarked APs

Dynamic function (AP or client) according to position

IP protocol (2)

Multicast: IGMP (v1,v2, v3), PIM-SM, MSDP, MLD, MLDv2

IPSLA service probes (delay, package loss, jitter)

High availability: VRRP, TVRP (HSRP compatible)

security (2)

Certificates: CSR, SCEP, X.509v3, PKIX, LDAP revocation

Static and dynamic access lists and session-based Firewall

Detection of DoS and DDoS attacks

Service quality

Classification, marking, BW management, BW prioritisation and limitation

Up to 32 types 16 queues per interface

Strict policies (PQ), Low latency (LLQ), according weight/type (WFQ, CBWFQ)

Management

CLI configuration and storage in a plain text file

Assignment of user and group licenses

RADIUS and TACACS+ AAA support

IP protocol

ARP, ARP Proxy, MTU discovery, NAT, ECMP, BFD

RIP, OSPF, BGP, Policy based static and dynamic routing

Virtual Router Forwarding (Multi-VRF)

security

IPSec support in transport mode, tunnel and DMVPNs

Pre-shared authentication, RSA, Certificates, MDS, SHA-1

Encrypted: DES (56 bits), 3DES (168 bits), AES (128, 192 and 256 bits)

IP services

DHCP, DNS, FTP, SFTP, SSH, Telnet server and client

NTP, LDAP, Syslog, SCP client. TFTP server

DHCP, dynDNS relay

Specific WWAN functions

Automatic hand-over (passive and active probe-based detection)

Advanced link monitoring (package, latency, jitter error)

Triple SIM and double module associated with the hand-over mechanism

Management (2)

Netflow, RMON V5 and V9, SNMPv1, v2c y v3, Syslog support

Manageable via SMS

Remote Wireshark compatible traffic collection

ADDITIONAL TECHNICAL FEATURES

Asynchronous console and serial port interface

DB-9 connector with proprietary pinouts (including adapter)

Type RS232, N81

Default speed 9600 bps, maximum speed 115200 bps

VoIP

Protocols: SIP (UDP, TCP, TLS) and support for SIP terminals

GSM mediagateway for backup calls on a GSM network

Surviving services: Calls, hold, transfers

Traffic balance and broad band aggregation

Multipath per session (TCP/IP)

IPSec-based Smart Balancing aggregation mechanism

Use of DMVPNs and dynamic routing for application continuity

Embarked environment ruggedness and power supply protection

Power supply protection for direct battery power supply ISO7637-2

Certifications: EN 60068-2, EN60950-1, EN 55022, EN 55024

Delayed OFF (activated by the start-up motor)

FLEXIBLE COMMUNICATIONS SOLUTIONS THAT GROW WITH YOU.

H2-Automotive in-vehicle router

Rugged embarked communications platform for vehicles with LTE and Wi-Fi



Teldat is a leading provider in Enterprise Communications equipment and Services for the top corporate to mid-sized and SME markets.

About TELDAT



ROUTERS | Wi-Fi | MANAGEMENT | TRANSPORT | SMART GRID | INDUSTRIAL | VoIP | CLOUD | SECURITY | NFV |

Teldat Group is a leading technology holding that designs, manufactures and distributes advanced Internetworking platforms for corporate environments, providing new and cutting-edge communication solutions without ever losing sight of its customers real requirements. Teldat's solutions development is based on proprietary technology, which is in the Group's DNA. This allows Teldat to be a leading provider in Enterprise Communications equipment and Services for the top corporate to midsized markets, as well as the SME and SoHo markets.

From a geographical viewpoint, Teldat Group has a presence in all continents, with its corporate headquarters located in Spain, and operational affiliates in Europe (Germany, Austria, Portugal, Italy and France) and in LATAM (Mexico and Brazil), as well as two business development offices in USA and China.



Germany
bintec elmeg GmbH Suedwestpark
94. 90449 Nuremberg (Germany)
Phone: +49 911 9673 0 info@bintec-elmeg.com

France
6 Avenue Neil Armstrong Immeuble
le Lindbergh 33692 MERIGNAC
Cedex (France) Phone: +33(0)
57356300

USA
Silicon Valley Offices 718 University
Ave, Suite 210 Los Gatos, CA 95032
(USA) Phone: +1 408 892 9363

Italy
Viale Edison 637. 20099 Sesto San
Giovanni (MI) (Italy) Phone:
+39(02)24416624

Mexico
Diagonal 27. Colonia del Valle,
Mexico D.F. 03100 (Mexico). Phone:
+52(55)55232213

Portugal
Rua Açucar, 78 1950-009 Lisboa,
(Portugal) Phone: +351 21 862 20
40

Brazil
Rua Mocaci 395 Office 123, Moema,
CIEP 04083-000- São Paulo - SP,
(Brazil) Phone: +55 11 9 9480 8522

China
(A060), F10 SOHO Nexus Centre
No19A, East 3rd Ring North Road,
Chaoyang District, Beijing 100020
(China). Phone: +86 10 57351071

Spain
Head Office: Teldat S.A. Parque
Tecnológico de Madrid 28760
Tres Cantos, Madrid (Spain)
Phone: +34 91 807 6565
D'Anna Piferrer 1-3 08023
Barcelona (Spain) Phone: +34
93 253 0222 info@teldat.com
www.teldat.com